


COPPER SERVICE INSTALLATION

NOTES:

1. COPPER TUBING AND METER SETTER TO BE SAME SIZE AS CORPORATION STOP.
2. SEE STANDARD DRAWING W-403 FOR DETAIL OF CONNECTION TO MAIN.
3. 6 MIL POLYETHYLENE WRAP WITH 10 MIL TAPE @ 5' INTERVALS SHALL BE REQUIRED.

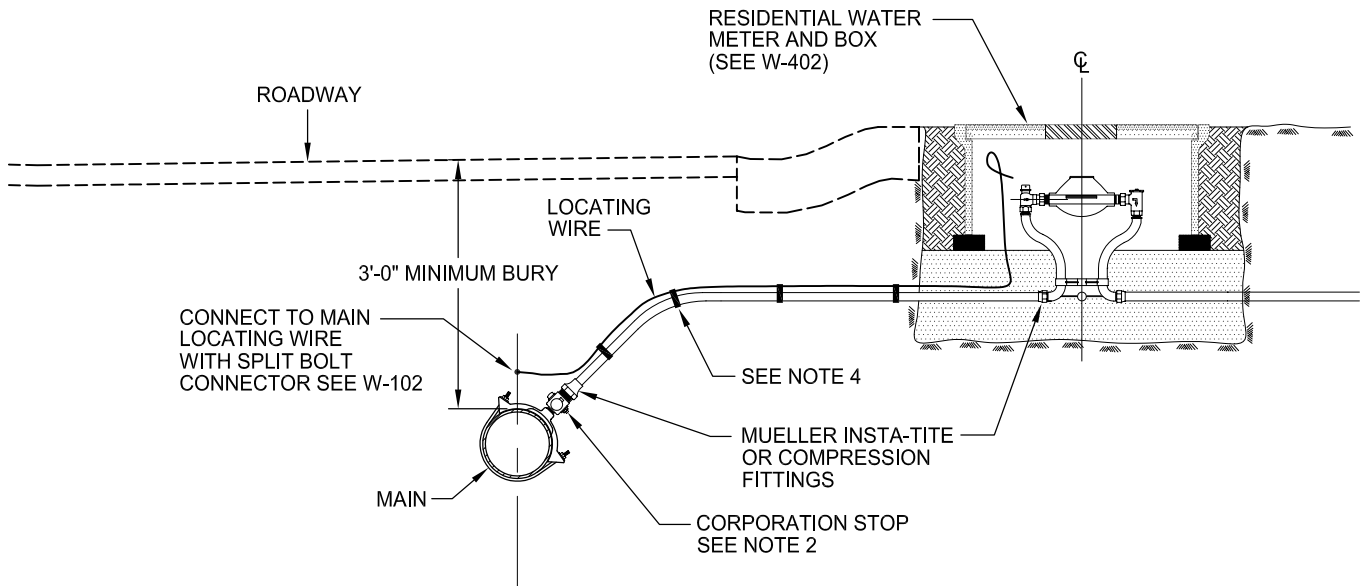

HDPE SERVICE INSTALLATION

NOTES:

1. COPPER TUBING SIZE HDPE PIPE AND METER SETTER TO BE SAME SIZE AS CORPORATION STOP.
2. SEE STANDARD DRAWING W-403 FOR DETAIL OF CONNECTION TO MAIN.
3. LOCATING WIRE TERMINATING IN METER BOX SHALL EXTEND INSIDE BOX A MINIMUM OF 10".
4. CONNECT LOCATING WIRE TO HDPE USING 10 MIL TAPE @ 3' INTERVALS.

| REV. | DATE | DESCRIPTION |
|------|------|-------------|
| | | |
| | | |
| | | |

R:\Utilstads\City_Std_Details\Water_Uilities\W_405_1inchResWtrServsWaterSetter.dwg