


FLAT SLAB TOP

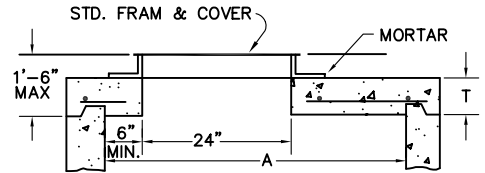

FLAT SLAB SHALL BE USED WHEN DEPTH DOES NOT PERMIT USE OF TAPER UNIT


TABLE OF DIMENSIONS

M.H.	A	B	T MIN.
48"	48"	18"	6"

DIMENSION "B" IS A MINIMUM DIMENSION AND MAY BE GREATER IF DEPTH PERMITS.

RISER SECTIONS, CONES, AND ADJUSTING RINGS SHALL CONFORM TO ASTM DESIGNATION C-478

FRAME SHALL BE SECURED TO RISER OR FLAT SLAB TOP WITH CEMENT MORTAR

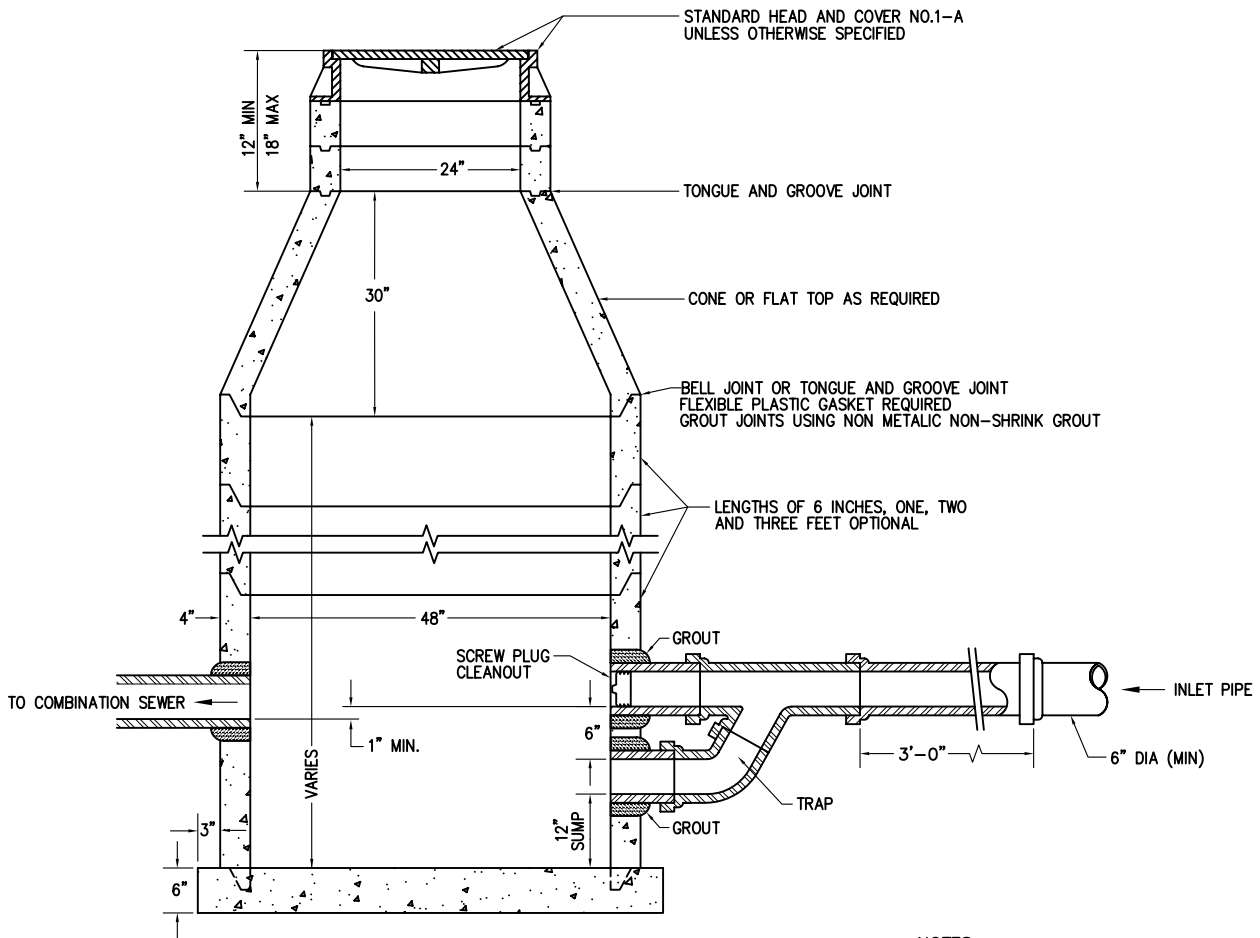

SECTION

NOTES

MANHOLES SHALL CONFORM TO SEC. 25 OF THE CITY STANDARD SPECIFICATION

FLEXIBLE COUPLING ON ALL PIPE UP TO 15" DIA. ENTERING MANHOLE WITHIN 1' OF BASE. "COR-N-SEAL" OR APPROVED EQUAL.